

Chiller 331.1 kW ⁽¹⁾ 7°C water and 35°C air

Model	CGAM 120 HE SQ
Power input at nominal (kW)	107.1
Compressor type	Scroll
Minimum load (%)	25
Water flow at nominal (l/s)	15.8
Compressors, qty	4
Refrigerant circuit, qty	2
Refrigerant, type	R410a
Sound pressure level 10 m free field condition	55 dB(A)
Pressure vessel approval	PED

Operating range

Ambiant air (°C)	-18 to 45
Water flow (l/s)	6.3 to 19
Leaving water temp (°C)	-12 to 18

Capacity at °C water temp:	0°C	5°C	7°C	9°C	13°C
Capacity (kW) 35°C air	263	312	331	351	390
Power input (kW) 35°C air	101	106	109	109	113

Leaving water -12°C

Capacity (kW) 20°C air	165
Power input (kW) 20°C air	93

Electrical data

Power supply (V/Ph/Hz)	400/3/50
Amps max (A)	247
Starting amps (A)	509

Evaporator connection type	Camelock 4 inches
----------------------------	-------------------

Dimensions & Weight

Length (mm)	4521
Width (mm)	2438
Height (mm)	2591
Weight (kg)	4428




Options

Disconnect switch	Yes
Gauges	Yes
Flow switch	Yes
Water pump	Single

Water content

Evaporator (l)	43.4
----------------	------

Available head pressure

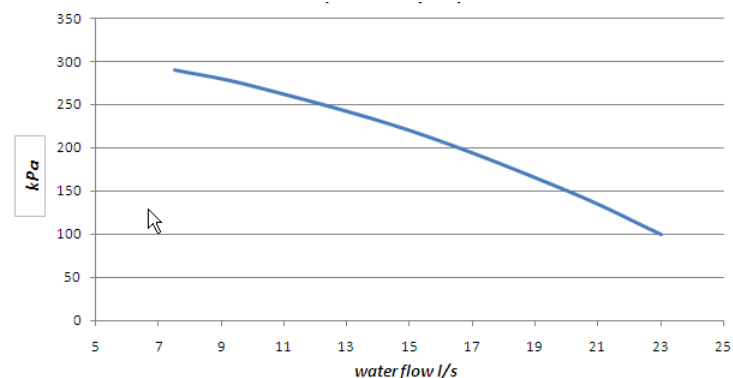

Trane optimizes the performance of homes and buildings around the world. A business of Ingersoll Rand, the leader in creating and sustaining safe, comfortable and energy efficient environments, Trane offers a broad portfolio of advanced controls and HVAC systems, comprehensive building services, and parts. For more information, visit www.Trane.com.

Trane has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.

© 2014 Trane All rights reserved

We are committed to using environmentally conscious print practices that reduce waste.

(1) At Eurovent conditions: 12/7°C entering/leaving water temperature and 35°C ambient air temperature