

# Chiller heat pump 292.8 kW <sup>(1)</sup> 7°C water and 35°C air

Model	CXAM 100
Power input at nominal (kW)	93.7
Compressor type	Scroll
Minimum load (%)	25
Water flow at nominal (l/s)	14
Compressors, qty	4
Refrigerant circuit, qty	2
Refrigerant, type	R410a
Sound pressure level 10 m free field condition	56 dB(A)
Pressure vessel approval	PED

## Operating range

Ambiant air (°C) cooling mode	-18 to 40
Ambiant air (°C) heating mode	-10 to 18
Water flow (l/s)	6.8-20.4
Leaving water (°C) cooling mode	-12 to 18
Leaving water (°C) heating mode	25 to 55

## Cooling capacity at °C water temp

	0°C	5°C	7°C	9°C	13°C
Capacity (kW) 35°C air	230	275	292	311	348
Power input (kW) 35°C air	89.3	92.4	93.7	95	97.6

## Heating capacity at °C air 80% RH

	-5	1°C	7°C	10°C	13°C
Heating Cap. (kW) water 35/45°C	209	244	284	308	333
Power input (kW) water 35/45°C	91.1	91.6	92.1	92.3	92.4

## Electrical data

Power supply (V/Ph/Hz)	400/3/50
Amps max (A)	204
Starting amps (A)	417

Evaporator connection type Bauer & Victaulic 4

## Dimensions & Weight

Length (mm)	5800
Width (mm)	2438
Height (mm)	2591
Weight (kg)	5010




## Options

Disconnect switch	Yes
Gauges	Yes
Flow switch	Yes
Water pump	Dual

## Water content

Evaporator (l)	46.7
----------------	------

## Available head pressure

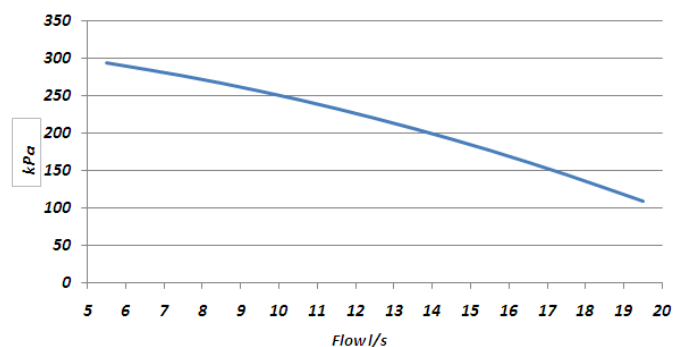

Trane optimizes the performance of homes and buildings around the world. A business of Ingersoll Rand, the leader in creating and sustaining safe, comfortable and energy efficient environments, Trane offers a broad portfolio of advanced controls and HVAC systems, comprehensive building services, and parts. For more information, visit [www.Trane.com](http://www.Trane.com).

Trane has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.

© 2014 Trane All rights reserved

We are committed to using environmentally conscious print practices that reduce waste.

(1) At Eurovent conditions: 12/7°C entering/leaving water temperature and 35°C ambient air temperature